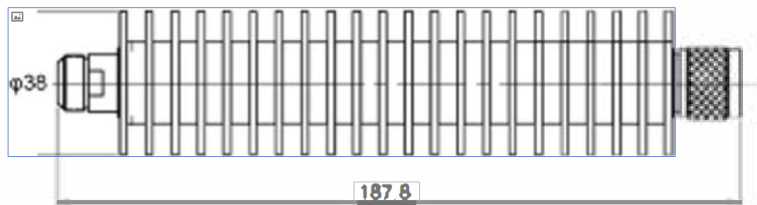


**N 100W 1-50dB 3G Attenuator (Aluminum Black Anodize)**

P.N : ATT\_N\_1-50dB\_100W3G

**Products feature**

- Reliable Attenuation & V.S.W.R
- Easy maintenance
- Wide broadband frequency application
- Directional 100 watt rating

**Electrical specification**

| Item                 | Specification                       |
|----------------------|-------------------------------------|
| Frequency Range      | DC ~ 3.0 GHz                        |
| Impedance (Nominal)  | 50Ω                                 |
| Average Power Rating | 100 Watt                            |
| Attenuation          | 1-30dB ±1dB, 40-50dB ±1.5dB         |
| V.S.W.R (Max)        | 1.20                                |
| Temperature Range    | -55°C ~ +125°C                      |
| Connector Type       | N male(Input) –<br>N female(Output) |
| RoHS                 | Compliant                           |

**Material specification**

| Item      | Specification             |
|-----------|---------------------------|
| Connector | brass gold plated         |
| Housing   | Aluminum,Black<br>Anodize |